

Features

- 400 watts peak pulse power ($t_p = 8/20\mu s$)
- Protects two -7V to 12V lines
- Low capacitance
- Low clamping voltage
- Solid -state silicon avalanche technology
- IEC 61000-4-2 Level 4 ($\pm 8kV$ contact $\pm 15kV$ air)



RoHS
COMPLIANT




Marking: 7AM SOT-23

Applications

- Protection of RS -485 transceivers with extended common -mode range
- Security systems
- Automatic Teller Machines
- HFC systems
- Net works

Schematic Diagram



Absolute Maximum Ratings ($T_a=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Value	Units
Peak Pulse Power	$P_{PP}^{(1)}$	400	W
Peak Pulse Current	$I_{PP}^{(1)}$	12	A
Lead Solder Temperature – Maximum (10 Second Duration)	T_L	260	°C
Junction Temperature	T_J	-55 to 125	
Storage Temperature	T_{STG}	-55 to 150	

Note: 1 Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5.

Electrical Characteristics ($T_a=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Condition	Pins 1 to 3 and 2 to 3 (12V TVS)			Pins 3 to 1 and 3 to 2 (7V TVS)			Unit
			Min	Typ.	Max	Min	Typ.	Max	
Reverse standoff voltage	V_{RWM}	Pin 3 to 1 or Pin 2 to 1			12			7	V
Breakdown voltage	V_{BR}	$I_T=1mA$	13.3			7.5			V
Reverse leakage current	I_R	$V_R=V_{RWM}$			1			1	μA
Clamping voltage	V_C	$I_{PP}=5A, t_p=8/20\mu s$			20			10	V
		$I_{PP}=12A, t_p=8/20\mu s$			26				
Junction capacitance	C_J	$V_R=0V, f=1MHz$			75			75	pF
		$V_R=0V, f=1MHz$		45			45		

Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

Figure 1 Non-Repetitive Peak Pulse Power vs. Pulse Time

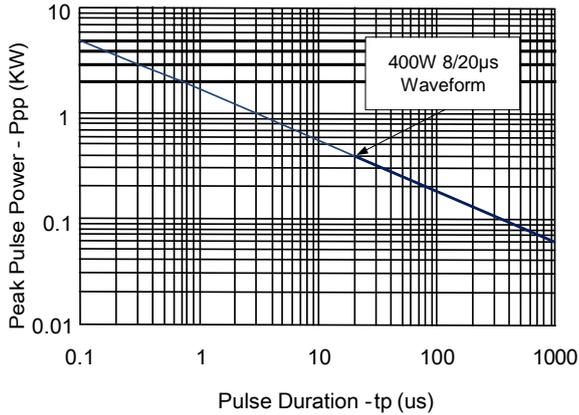


Figure 2 Power Derating curve

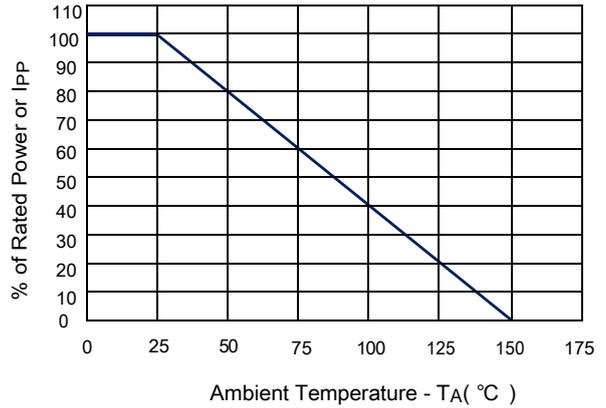


Figure 3 Pulse Waveform

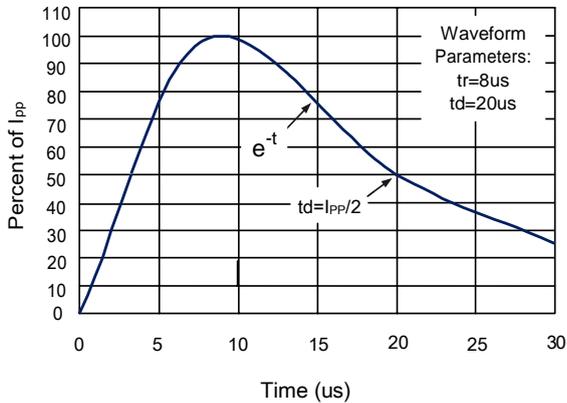


Figure 4 Clamping Voltage vs. Peak Pulse Current


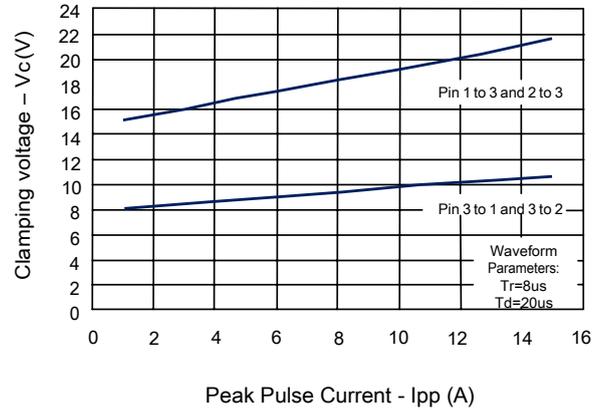


Figure 5 Capacitance vs. Reverse Voltage

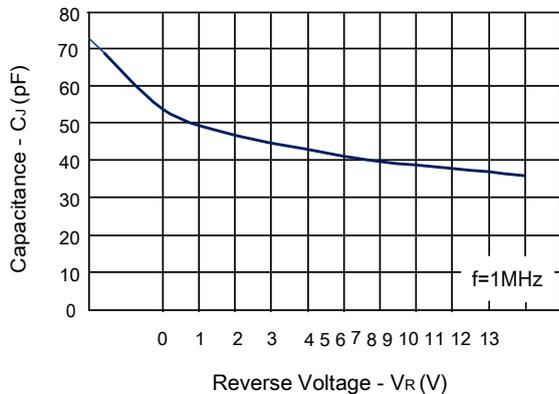


Application Information


Device Connection for Protection of Two RS-485 Data Lines

EIA RS-485 specifies a $\pm 7V$ ground difference between devices on the bus. This permits the bus voltage to range from +12V (5V + 7V) to -7V (0 - 7V).

RS-485 Common Mode Voltages

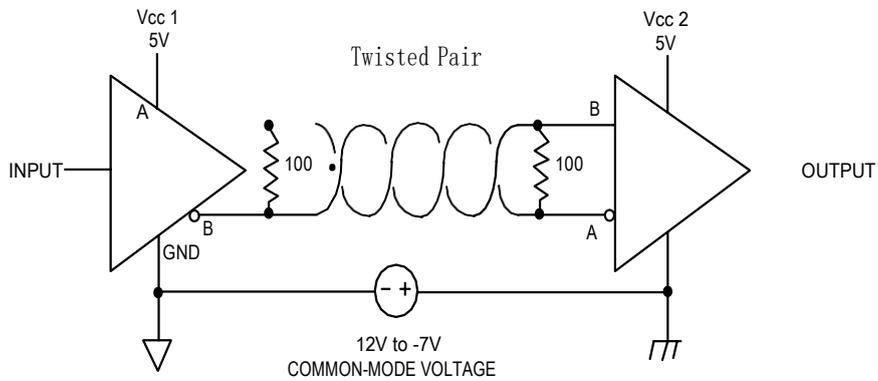


RS-485 Protection Circuit

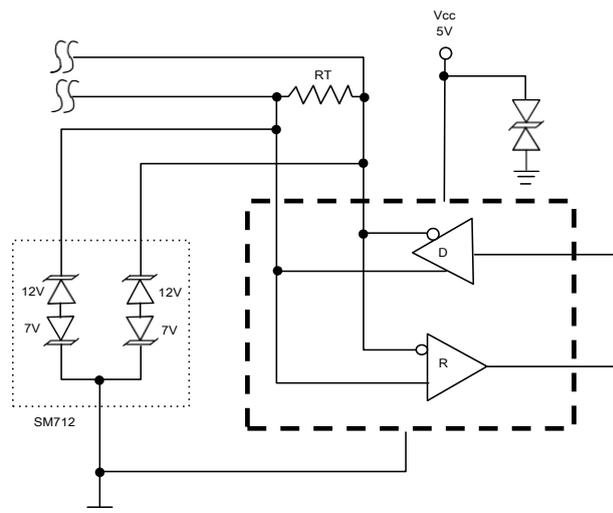

Package Outline Dimensions

millimeters

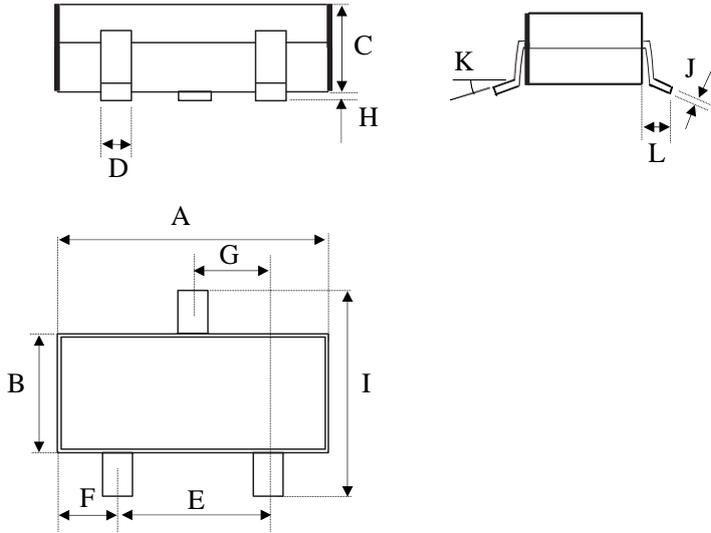

Dim	millimeters	
	min	max
A	2.80	3.00
B	1.20	1.40
C	0.89	1.11
D	0.30	0.50
E	1.78	2.04
F	0.45	0.60
G	0.89	1.02
H	0.013	0.100
I	2.25	2.55
J	0.085	0.177
K	0°	10°
L	0.45	0.60

Revision History

Document Version	Date of release	Discription of changes
Rev.A	2014.03.25	First issue

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.