

SOT -23 Silicon Epitaxial Planar Diodes


Features


- AEC-Q101 Qualified
- Halogen and Antimony Free(HAF), RoHS compliant



SOT-23









Absolute Maximum Ratings (T _J =25°C unless otherwise noted)						
Parameter	Symbol	Value	Unit			
Maximum Repetitive Reverse Voltage	V_{RRM}	250	V			
Reverse Voltage		V _R	200	V		
Forward Current		I _{F(AV)}	400	mA		
Repetitive Peak Forward Current	Repetitive Peak Forward Current		625	mA		
	t = 10ms		1.7			
Non-repetitive Peak Forward Surge Current	t = 100us	I _{FSM}	3	Α		
	t = 1us		9			
Power Dissipation(Note 1)		P _D	350	°C		
Storage Temperature Range	T _J , T _{STG}	-65 ~ +150	°C			

Thermal Characteristics			
Parameter	Symbol	Max.	Unit
Typical Thermal Resistance Junction-to-Ambient (Note 1)	RөJA	357	°C/W

Note 1: Device mounted on FR-4 PCB with minimum recommended pad layout...



ABAV23/ SE / CC / CA GOOD-ARK Electronics

Electrical Characteristics (T _J =25°C unless otherwise noted)						
Parameter	Symbol	Test Conditions	Min.	Max.	Unit	
Reverse Breakdown Voltage	V _{(BR)R}	I _R =100μA,	250	-	V	
Forward Valtage	V-	I _F =100mA -		1	V	
Forward Voltage	VF	IF =200mA	-	1.25	V	
Deveree Comment		V _R =200V, T _J =25°C	100	nA		
Reverse Current	IR	V _R =200V, T _J =150°C		100	uA	
Total Capacitance	C _{tot}	V _R =0V, f=1MHz	-	5	pF	
Reverse Recovery Time	t _{rr}	V _R = 0 V, f =1MHz	-	50	ns	



Typical Characteristics Curves (TJ = 25°C unless otherwise noted)




Fig.1 -Power Derating Curve




Fig.2 -Forward Characteristics Curve




Fig.3 -Junction Capacitance





Fig.4 -Forward Continuous Current Derating Curve




Package Outline Dimensions (Unit: millimeters)

SOT-23

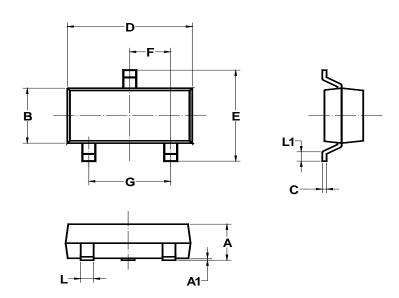

UNIT	Α	A1	В	С	D	E	F	G	L	L1
mm	1.20 0.89	0.100 0.013	1.40 1.20	0.19 0.08	3.04 2.80	2.6 2.2	1.02 0.89	2.04 1.78	0.51 0.37	0.2 MIN


Recommended Soldering Footprint (Unit: millimeters)



Packing Information

Package	Tape Width		Pitch Reel Size		Pitch Reel Size		Per Reel Packing
SOT-23	mm	mm	inch	mm	inch	Quantity	
301-23	8	4±0.1	0.157±0.004	178	7	3000	

Marking Information



- " ** " = Part No
- 2. "•" = HAF (Halogen and Antimony Free)
- " Y " = Year
- "M " = Month

Font type: Arial

Туре	Marking	Туре	Marking	Туре	Marking	Туре	Marking
ABAV23	HC	ABAV23SE	PY	ABAV23CC	PZ	ABAV23CA	RA

Revision History

Version	Date	Description of changes
Rev.A	2025.10.16	Primary



ABAV23/ SE / CC / CA

GOOD-ARK Electronics

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.