

SOT-23 Plastic-Encapsulate Zener Diode

Features

- Low Zener Impedance
- 300mW; Power Dissipation of 300mW
- High Stability and High Reliability




SOT-23


Mechanical Data

- SOT-23 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Epoxy UL: 94V-0
- Mounting Position: Any

Pin definition



Equivalent circuit



Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	300	mW
Forward voltage @ $I_F=10\text{mA}$	V_F	0.9	V
Junction and Storage Temperature	T_J, T_{STG}	-65 to +150	$^{\circ}\text{C}$

Thermal Characteristics

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Lead	R_{thJL}	150	$^{\circ}\text{C/W}$
Thermal Resistance Junction to Ambient(<i>Note1</i>)	R_{thJA}	417	$^{\circ}\text{C/W}$





Note1: Device mounted on ceramic PCB: 7.6mm x 9.4mm x 0.87mm with pad areas 25mm²

Note2: Short duration test pulse used to minimize self-heating effect

Note3: $f=1\text{KHz}$


Electrical Characteristics (TA=25°C unless otherwise noted)									
Part Number	Marking	Vz1(@Izt)			Zzt@Izt	Zzk(Note3)		IR(Note2)	
		Min	Max	Izt	Max	Max	Izk	Max	VR
		(V)	(V)	mA	Ω	Ω	mA	uA	V
MMBZ5221B	KC1	2.28	2.52	20	30	1200	0.25	100	1.0
MMBZ5222B	KC2	2.38	2.63	20	30	1250	0.25	100	1.0
MMBZ5223B	KC3	2.57	2.84	20	30	1300	0.25	75	1.0
MMBZ5224B	KC4	2.66	2.94	20	30	1400	0.25	75	1.0
MMBZ5225B	KC5	2.85	3.15	20	30	1600	0.25	50	1.0
MMBZ5226B	KG1	3.14	3.47	20	28	1600	0.25	25	1.0
MMBZ5227B	KG2	3.42	3.78	20	24	1700	0.25	15	1.0
MMBZ5228B	KG3	3.71	4.10	20	23	1900	0.25	10	1.0
MMBZ5229B	KG4	4.09	4.52	20	22	2000	0.25	5.0	1.0
MMBZ5230B	KG5	4.47	4.94	20	19	1900	0.25	5.0	2.0
MMBZ5231B	KE1	4.85	5.36	20	17	1600	0.25	5.0	2.0
MMBZ5232B	KE2	5.32	5.88	20	11	1600	0.25	5.0	3.0
MMBZ5233B	KE3	5.70	6.30	20	7	1600	0.25	5.0	3.5
MMBZ5234B	KE4	5.89	6.51	20	7	1000	0.25	5.0	4.0
MMBZ5235B	KE5	6.46	7.14	20	5	750	0.25	3	5.0
MMBZ5236B	KF1	7.13	7.88	20	6	500	0.25	3	6.0
MMBZ5237B	KF2	7.79	8.61	20	8	500	0.25	3	6.5
MMBZ5238B	KF3	8.27	9.14	20	8	600	0.25	3	6.5
MMBZ5239B	KF4	8.65	9.56	20	10	600	0.25	3	7.0
MMBZ5240B	KF5	9.50	10.50	20	17	600	0.25	3	8.0
MMBZ5241B	KH1	10.45	11.55	20	22	600	0.25	2.0	8.4
MMBZ5242B	KH2	11.40	12.60	20	30	600	0.25	1.0	9.1
MMBZ5243B	KH3	12.35	13.65	9.5	13	600	0.25	0.5	9.9
MMBZ5244B	KH4	13.30	14.70	9.0	15	600	0.25	0.1	10
MMBZ5245B	KH5	14.25	15.75	8.5	16	600	0.25	0.1	11
MMBZ5246B	KJ1	15.20	16.80	7.8	17	600	0.25	0.1	12
MMBZ5247B	KJ2	16.15	17.85	7.5	19	600	0.25	0.1	13
MMBZ5248B	KJ3	17.10	18.90	7.0	21	600	0.25	0.1	14
MMBZ5249B	KJ4	18.05	19.95	6.6	23	600	0.25	0.1	14
MMBZ5250B	KJ5	19.00	21.00	6.2	25	600	0.25	0.1	15
MMBZ5251B	KK1	20.90	23.10	5.6	29	600	0.25	0.1	17
MMBZ5252B	KK2	22.80	25.20	5.2	33	600	0.25	0.1	18
MMBZ5253B	KK3	23.75	26.25	5.0	35	600	0.25	0.1	19
MMBZ5254B	KK4	25.65	28.35	5.0	41	600	0.25	0.1	21
MMBZ5255B	KK5	26.60	29.40	4.5	44	600	0.25	0.1	21
MMBZ5256B	KM1	28.50	31.50	4.2	49	600	0.25	0.1	23
MMBZ5257B	KM2	31.35	34.65	3.8	58	700	0.25	0.1	25
MMBZ5258B	KM3	34.20	37.80	3.4	70	700	0.25	0.1	27
MMBZ5259B	KM4	37.05	40.95	3.2	80	800	0.25	0.1	30
MMBZ5260B	KM5	40.85	45.15	3.0	93	900	0.25	0.1	33
MMBZ5261B	KN1	44.65	49.35	2.7	105	1000	0.25	0.1	36
MMBZ5262B	KN2	48.45	53.55	2.5	125	1100	0.25	0.1	39
MMBZ5263B	KN3	53.20	58.80	2.2	150	1300	0.25	0.1	43
MMBZ5264B	KN4	57.00	63.00	2.1	170	1400	0.25	0.1	46
MMBZ5265B	KN5	58.90	65.10	2.0	185	1400	0.25	0.1	47
MMBZ5266B	KP1	64.60	71.40	1.8	230	1600	0.25	0.1	52
MMBZ5267B	KP2	71.25	78.75	1.7	270	1700	0.25	0.1	56

Typical Characteristics Curves (T_A = 25°C unless otherwise noted)

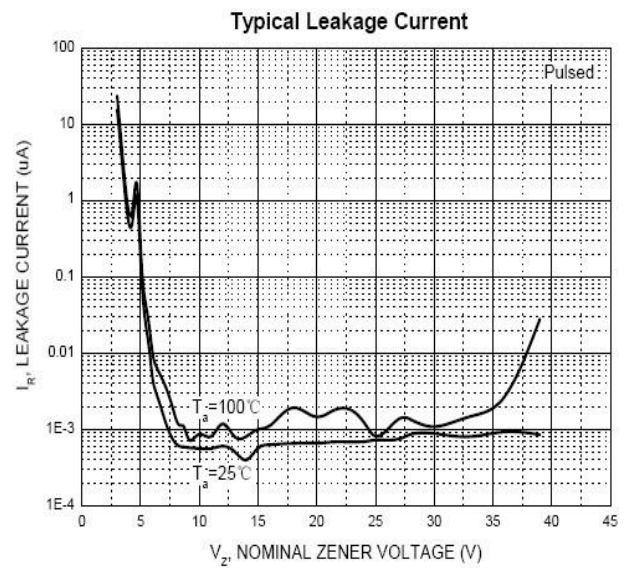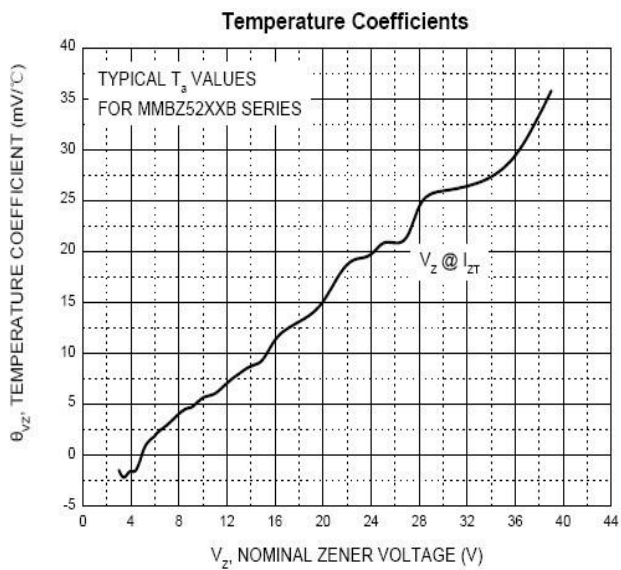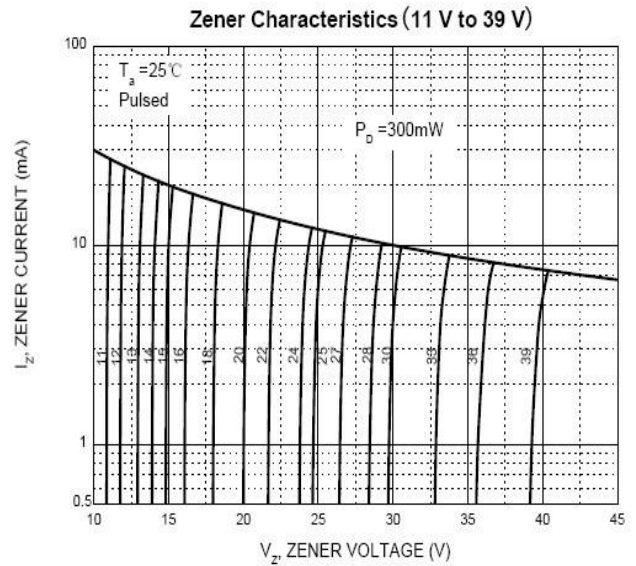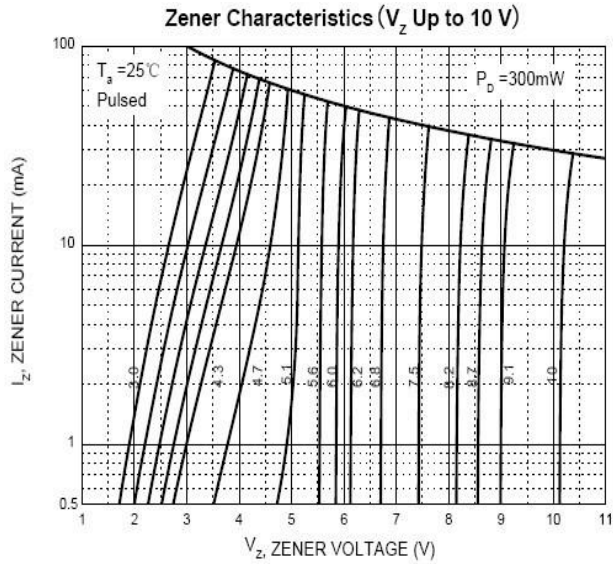


Typical Characteristics Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Typical Capacitance

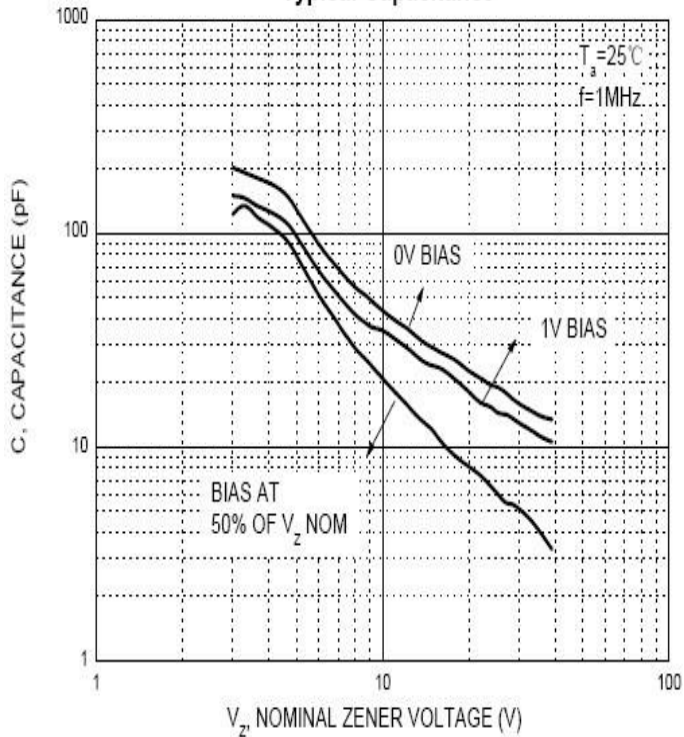


Effect of Zener Voltage on Zener Impedance

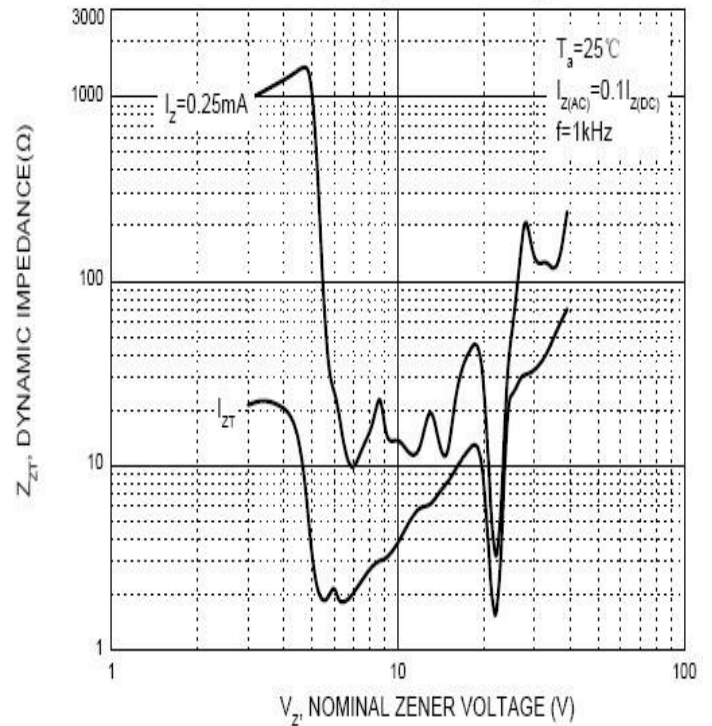

Power Derating Curve

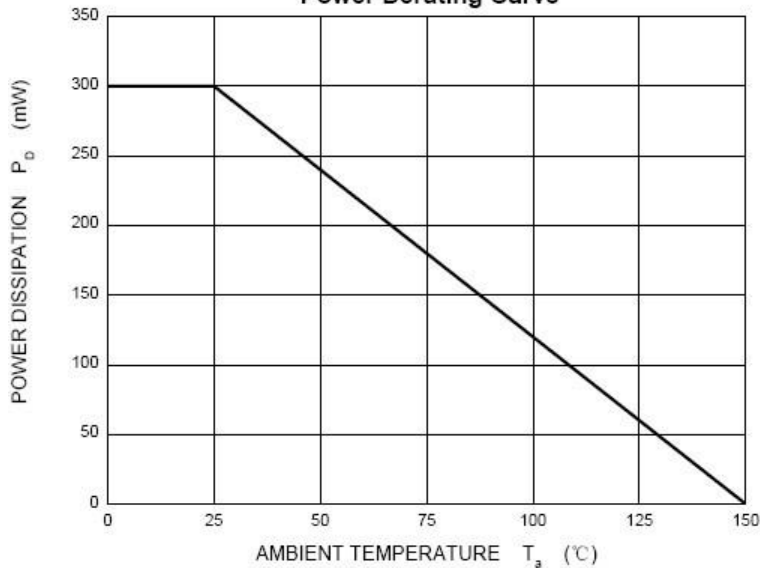

Package Outline Dimensions (Unit: millimeters)

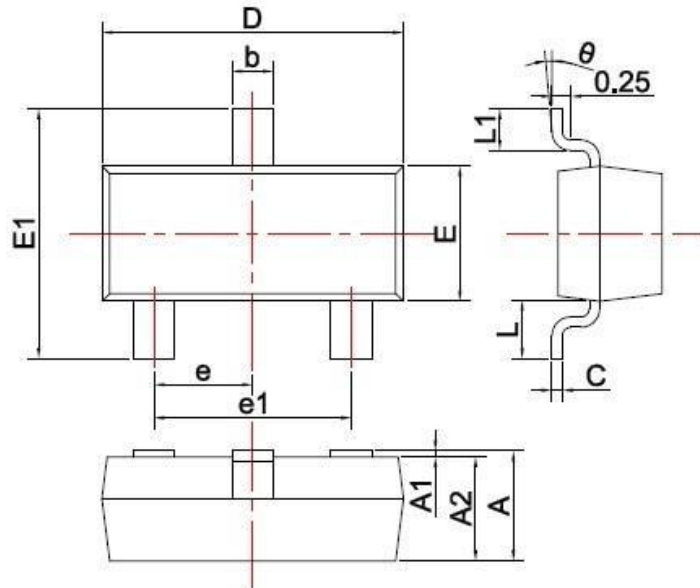

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

Revision History

Version	Date	Major Changes
Rev.A	2024.09.25	Official Release

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.